

ECO TUBE

innovative
LIGHTS



5 YEAR Limited Warranty	CE	RoHS	LM80	.IES/ .LDT	IP20	TM21	120lm/w	140lm/w
-------------------------------	----	------	------	---------------	------	------	---------	---------

Item	- 06H	- 12 H	- 15 H
L	588 mm	1198 mm	1498 mm



Nr. No.	Leistung Power	Farbtemperatur Color temperature	Spannung Voltage	Abmessungen Dimension	Farbwiedergabeindex CRI	PF PF	Lichtausbeute Luminaire efficacy
T8-06HM1A10-XX-Z05	10W	4000K 5000K 5700K 6500K	220V~240V	Φ 26x588mm	>70	>0,9	120lm/W
T8-12HM1A18-XX-Z05	18W	4000K 5000K 5700K 6500K	220V~240V	Φ 26x1198mm	>70	>0,9	120lm/W
T8-15HM1A24-XX-Z05	24W	4000K 5000K 5700K 6500K	220V~240V	Φ 26x1498mm	>70	>0,9	120lm/W
T8-12HM1A18-XX-Z05	18W	4000K 5000K 5700K 6500K	220V~240V	Φ 26x1198mm	>80	>0,9	140lm/W
T8-15HM1A24-XX-Z05	24W	4000K 5000K 5700K 6500K	220V~240V	Φ 26x1498mm	>80	>0,9	140lm/W

Lichtstrom-Toleranz +/- 10% | Luminous flux tolerance +/- 10%
XX: Farbtemperatur: WW-3000K / NW-4000K / PW-5000K / W-6500K

=

DE


TECHNISCHE DATEN

Umgebungstemperatur	0°C bis 45°C
Strom	10W, 18W, 24W
Material	PC
Lebensdauer	50.000 h
Farbe	milchiges Glas
Einsatzbereich	Büro, Labor, Klassenzimmer, Supermarkt, Geschäft, Restaurant, Hotel, Krankenhaus, Museum, Ausstellungsraum


EN

TECHNICAL DATA


Operating temperature	0°C~45°C
Power	10W, 18W, 24W
Material	PC
Lifetime	50.000 h
Colour	Milky glass
Application	Office, Laboratory, Classroom, Supermarket, Store, Restaurant, Hotel, Hospital, Museum, Show room

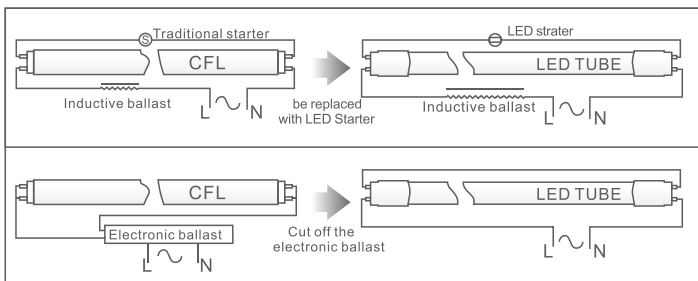

=
30W- 3000K-Milky glass

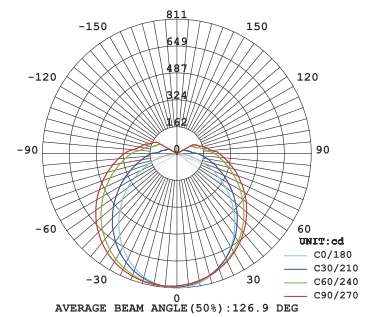

30W- 4000K-Tran-glass

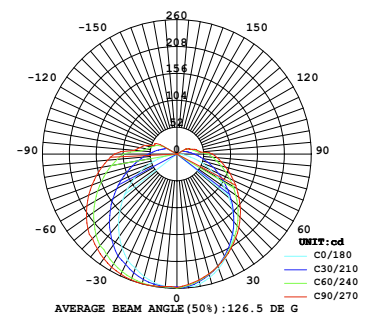

18W- 6500K-Milky glass

